

Fig. 1

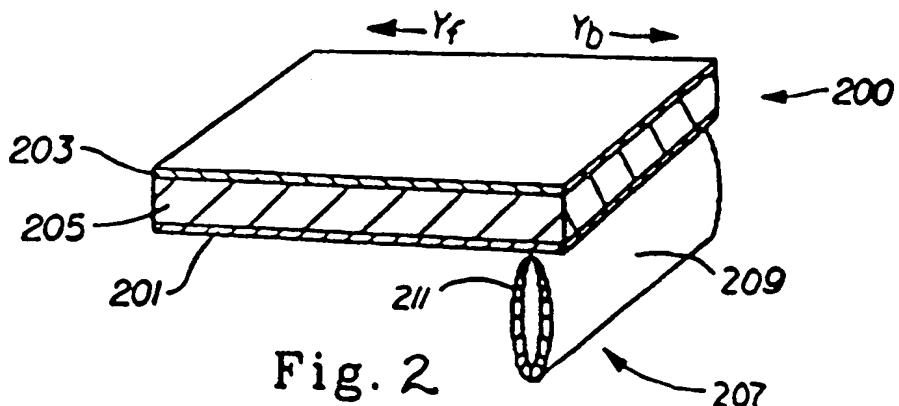


Fig. 2

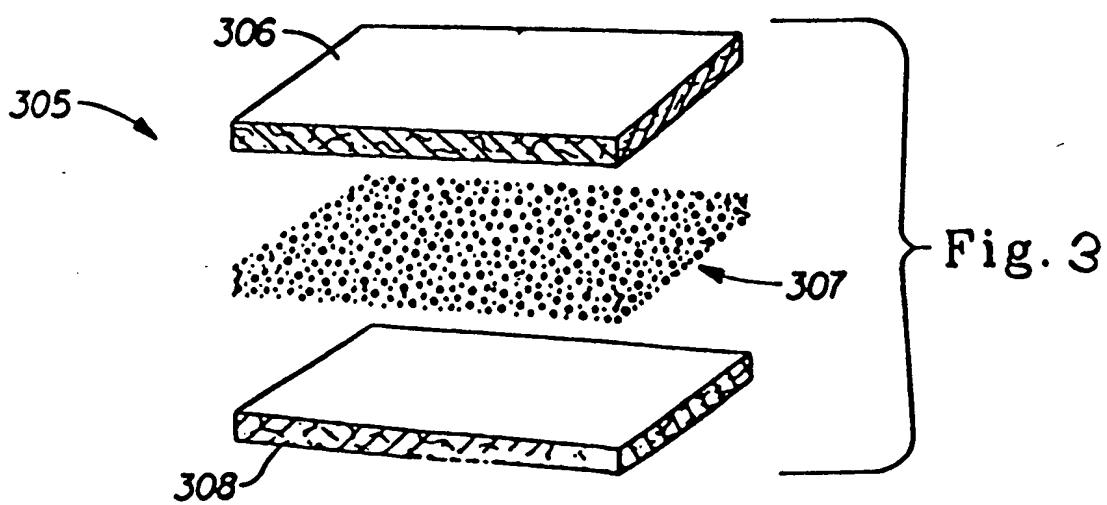


Fig. 3

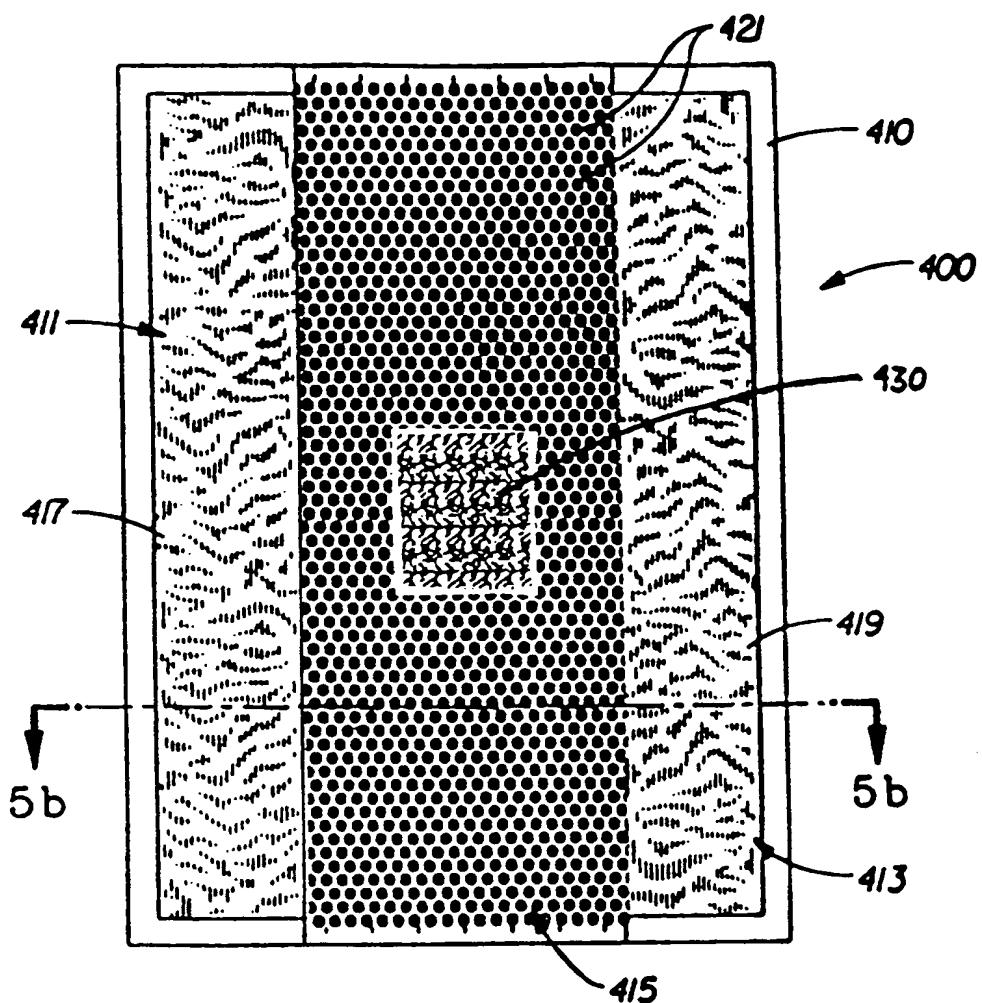


Fig. 4a


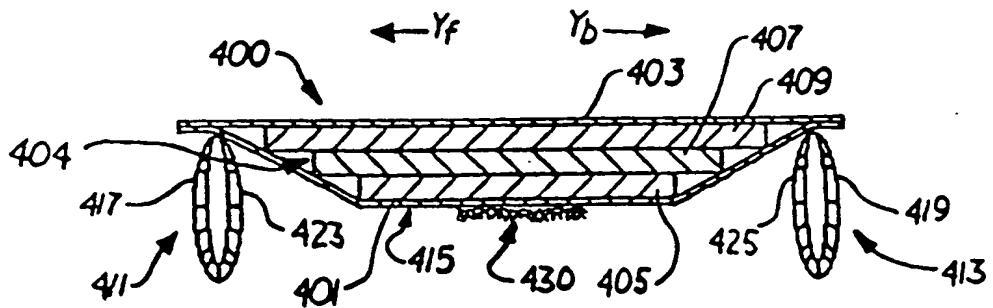


Fig. 4b

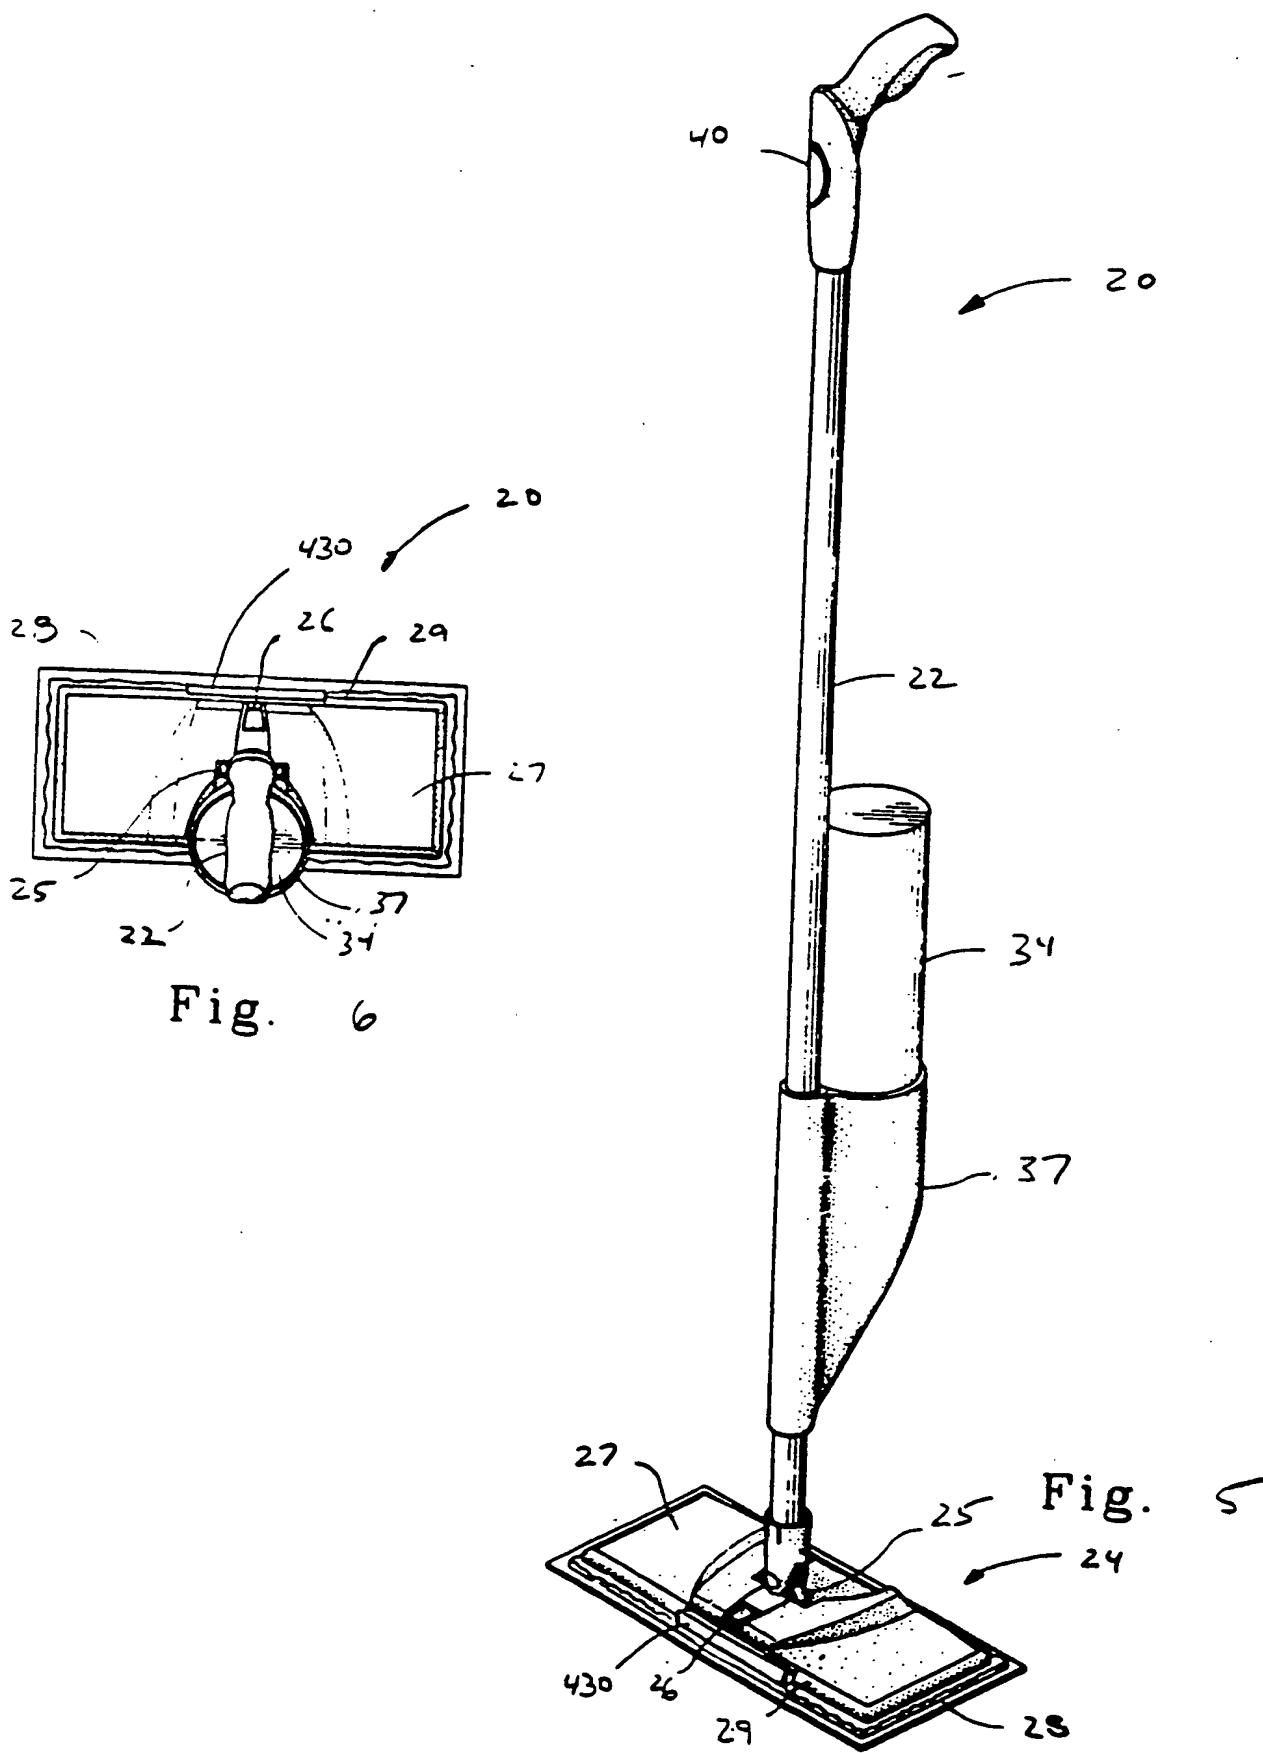

09/831480

WO 00/27271

4 / 13

PCT/US99/26579

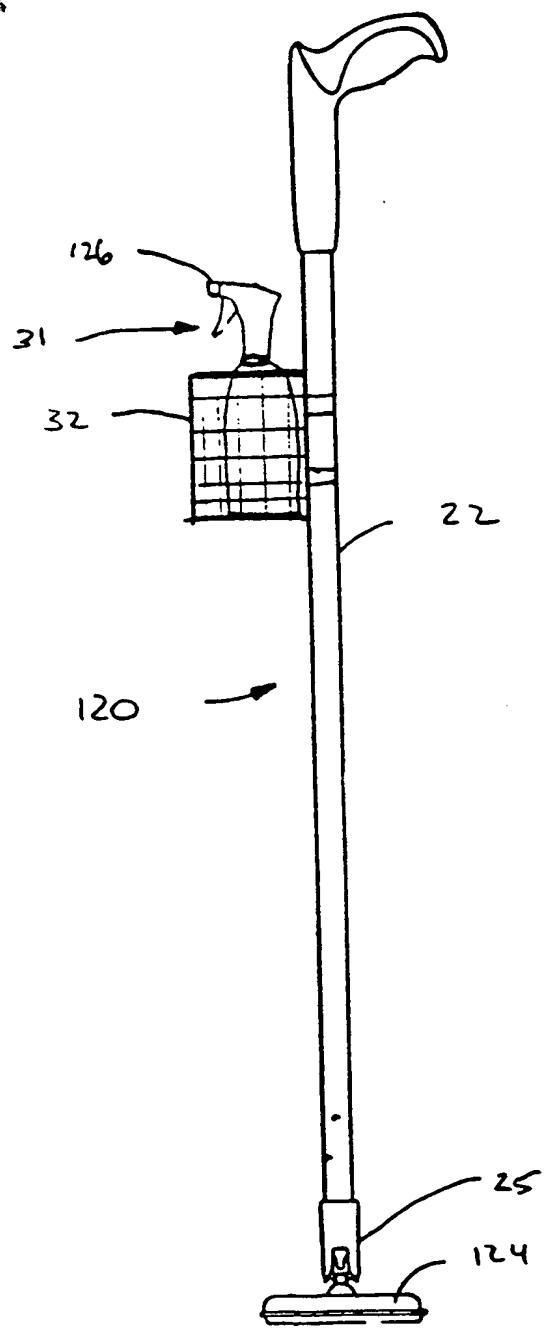


Fig. 7

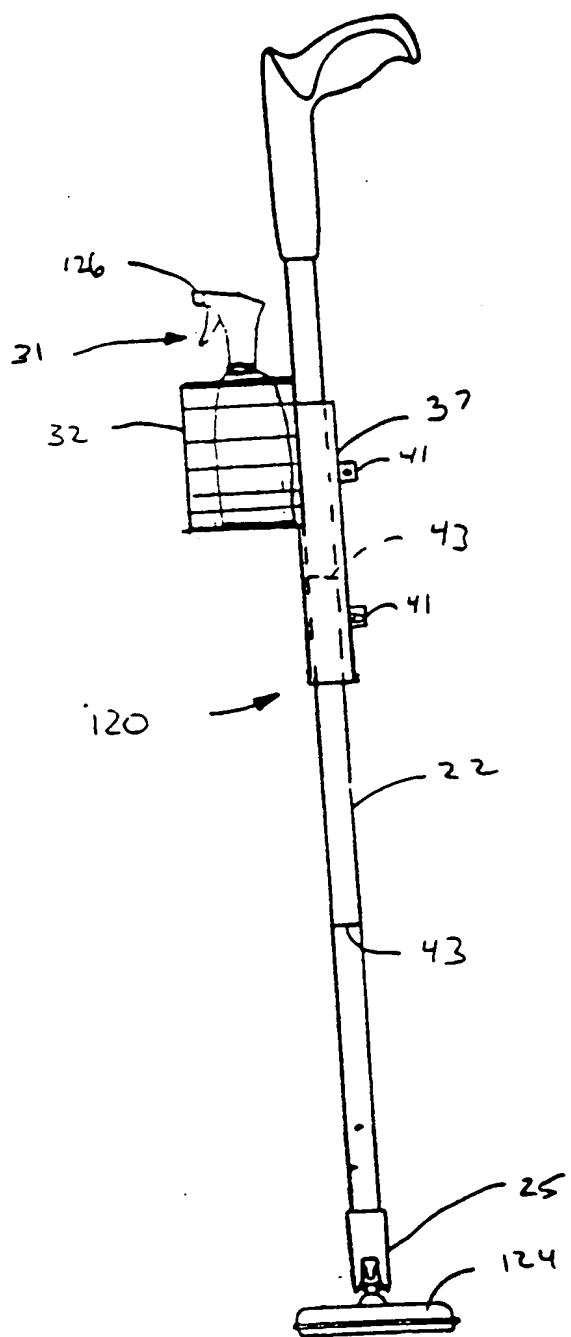


FIG. 7A

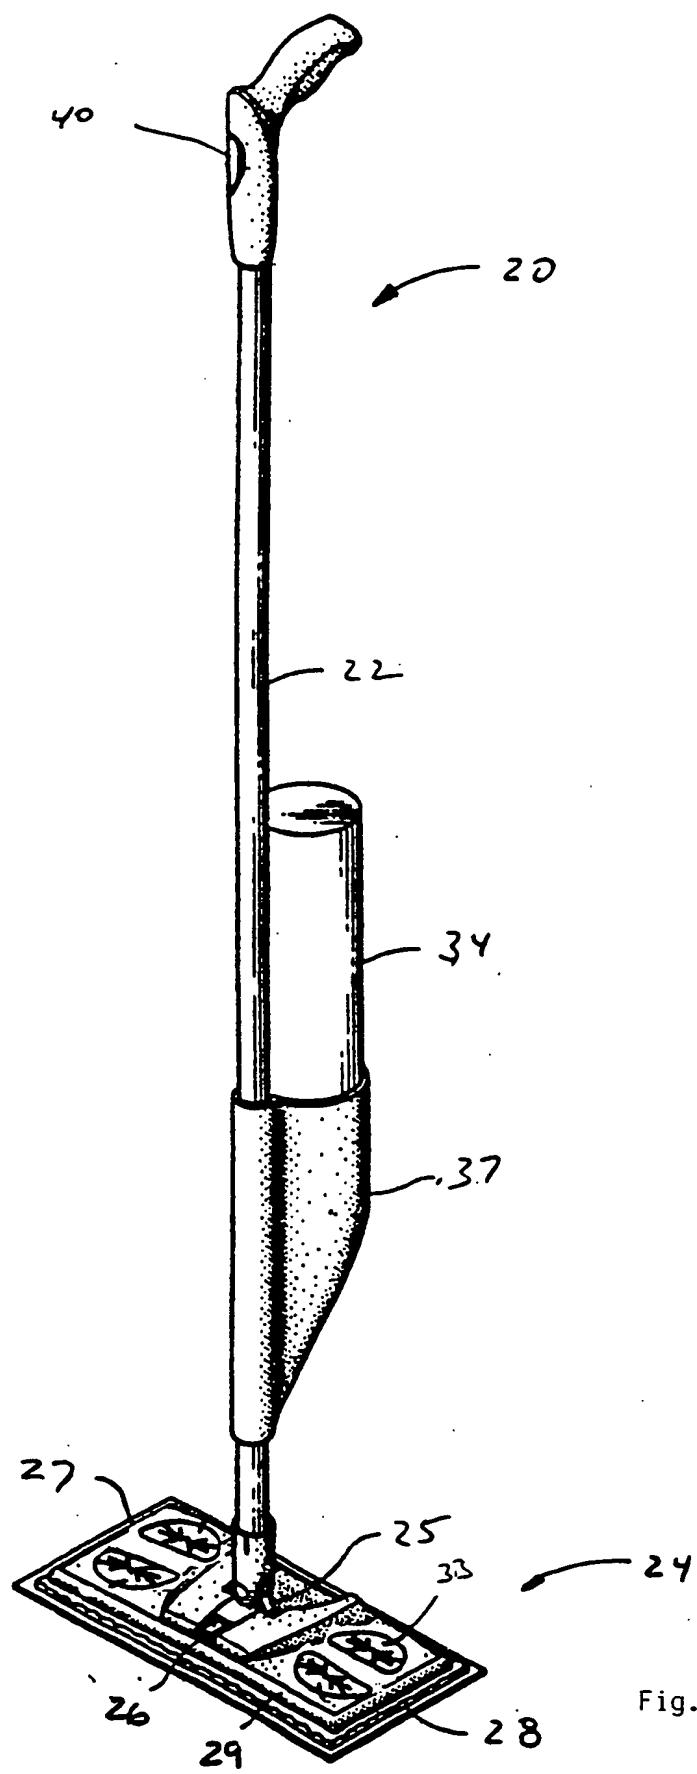


Fig. 8

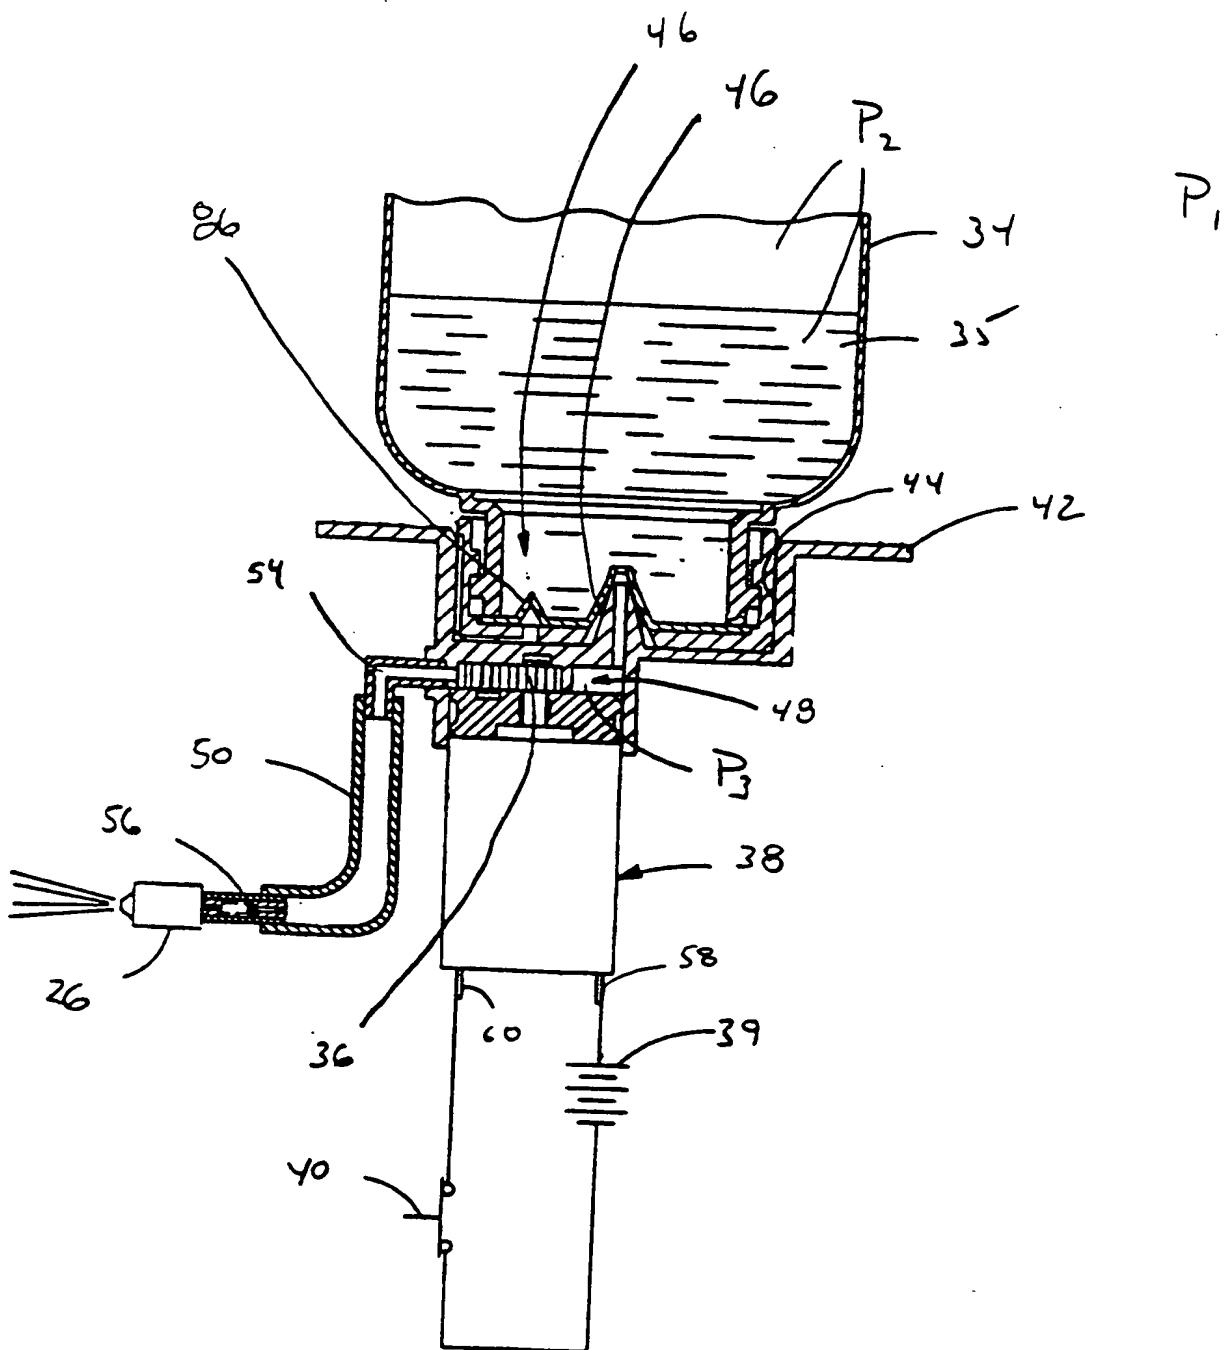


Fig. 9

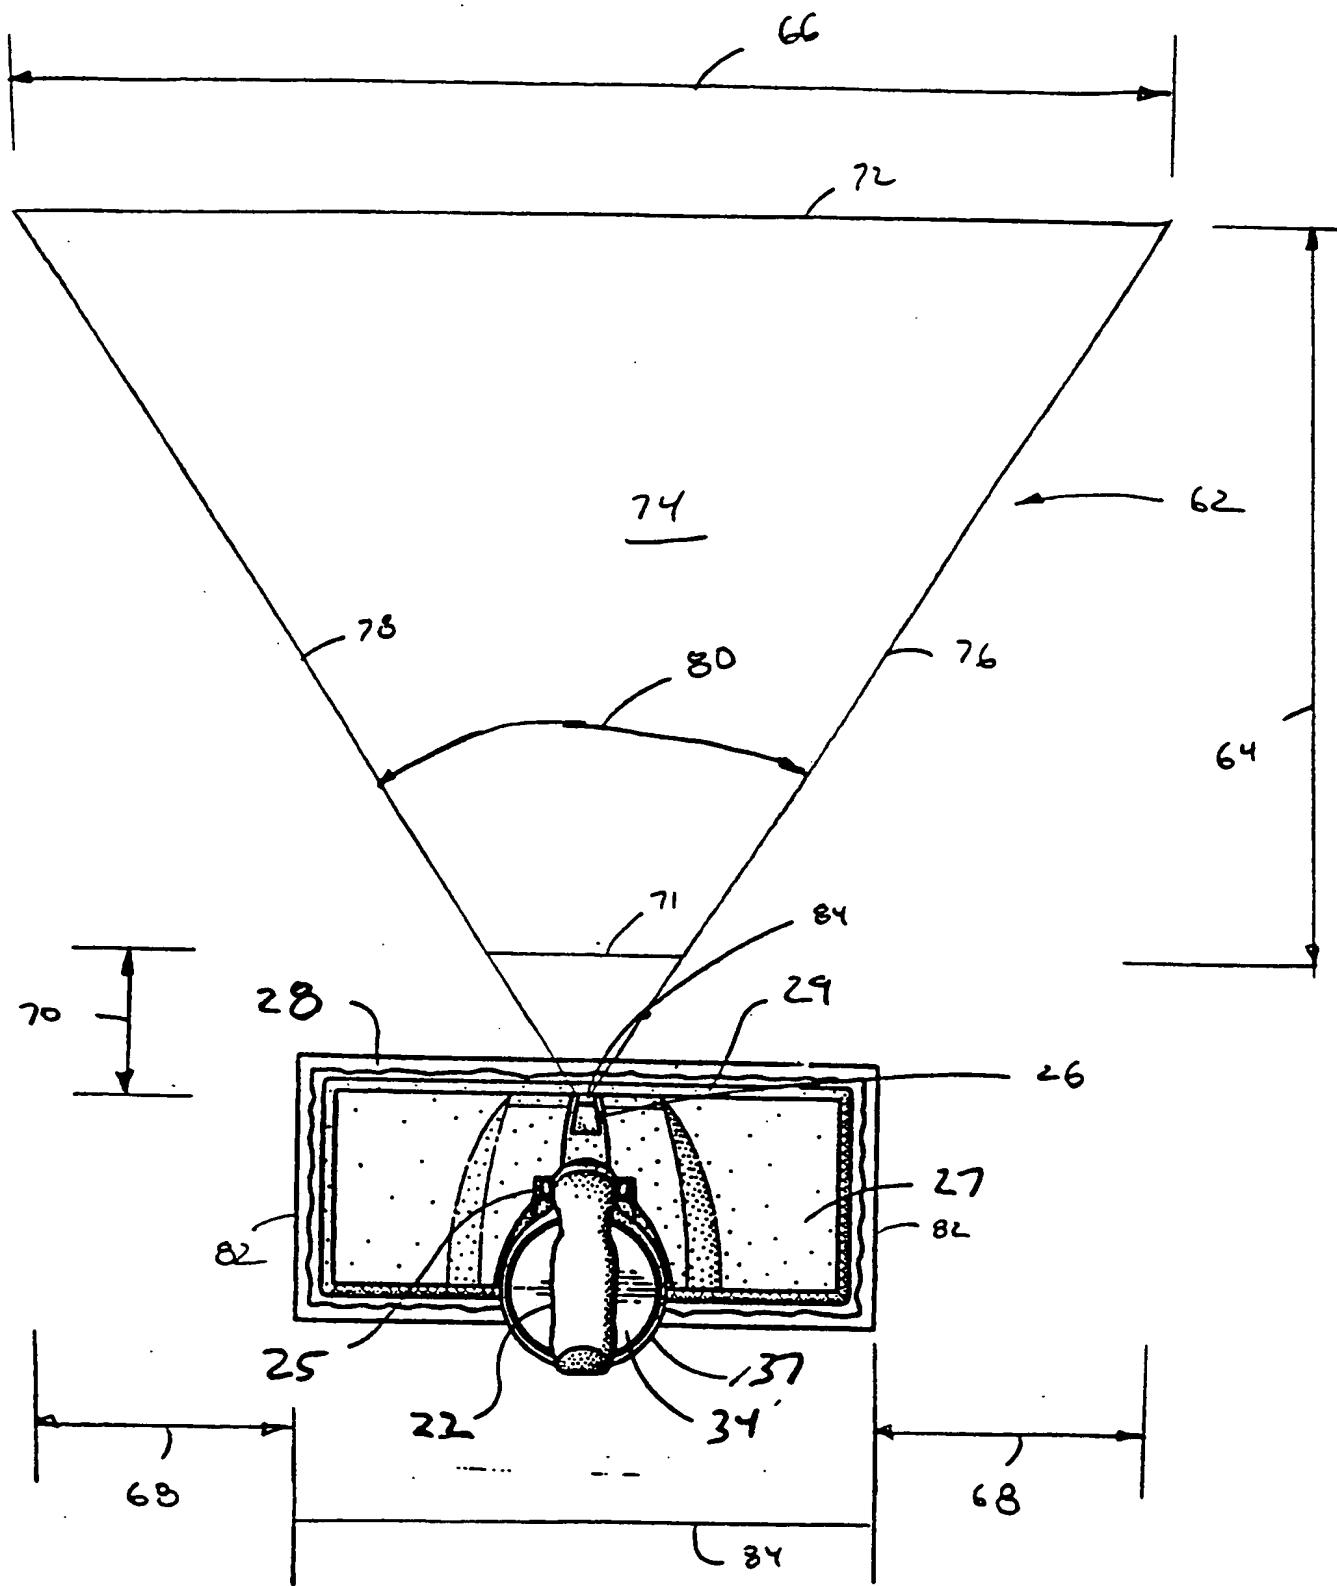



FIG. 10

WO 00/27271

- △ - Spray Nozzle Inlet Pressure (kpa)

Preferred Liquid Delivery System Performance Characteristics

- ◊ - Voltage at Motor Terminal (V)
- ■ - Volumetric Flow rate (ml/s)

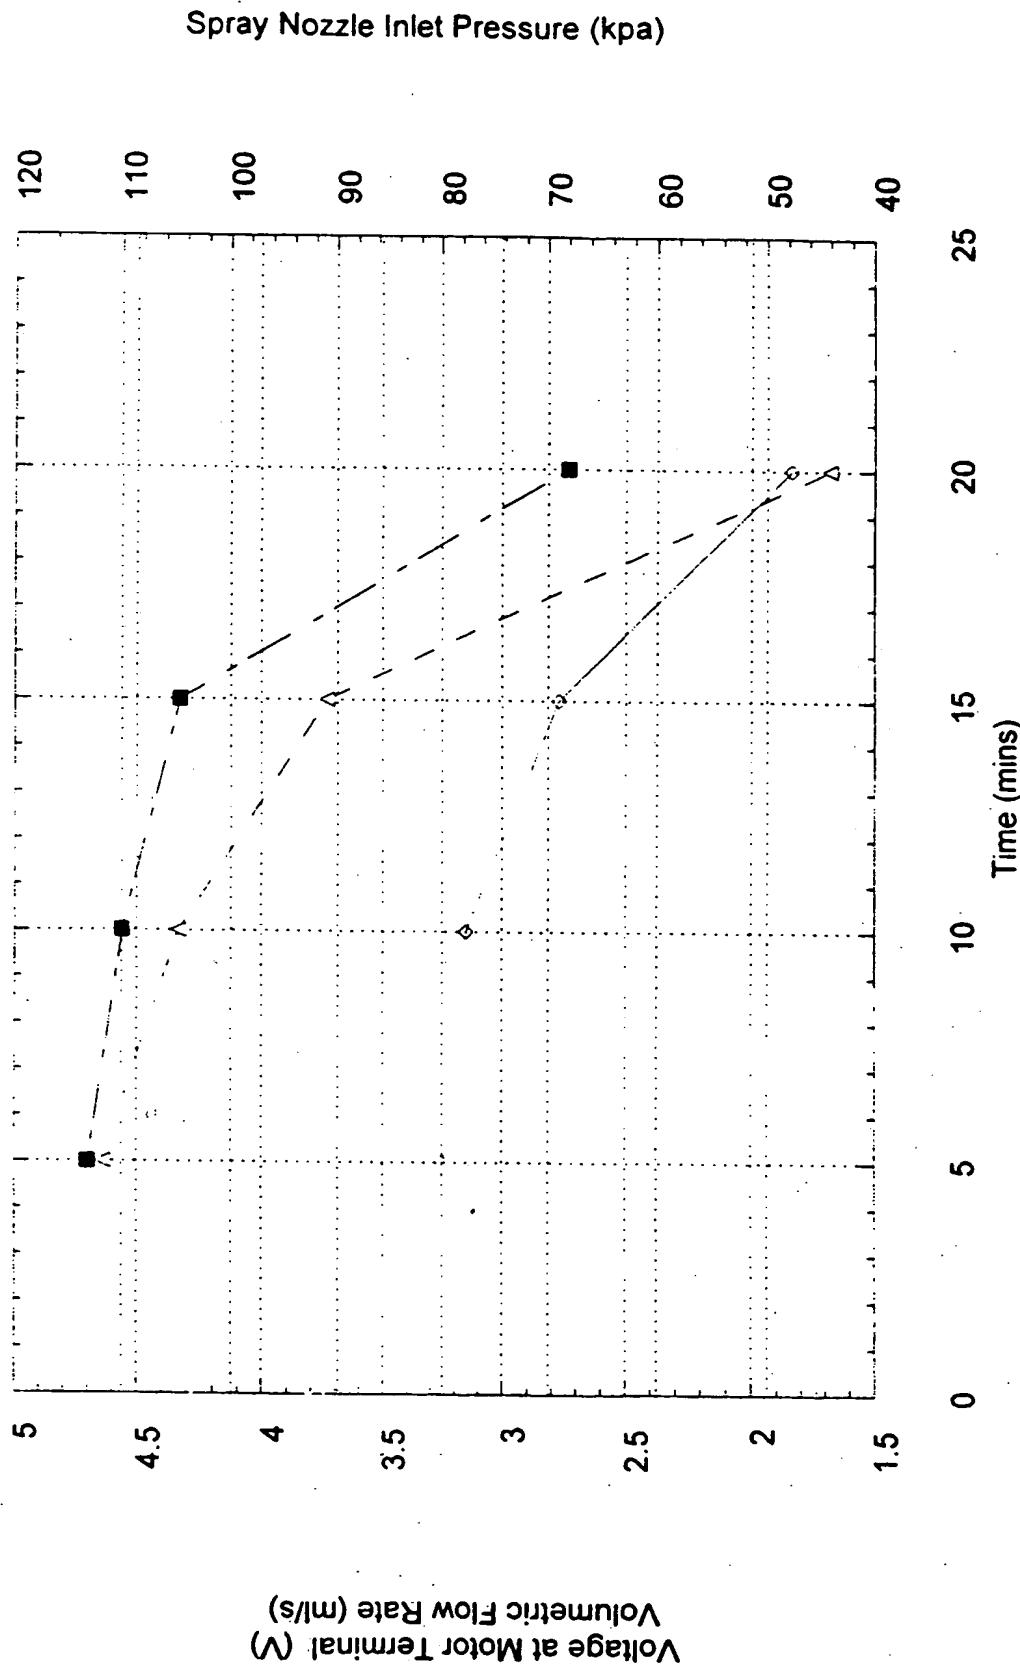

F16.11

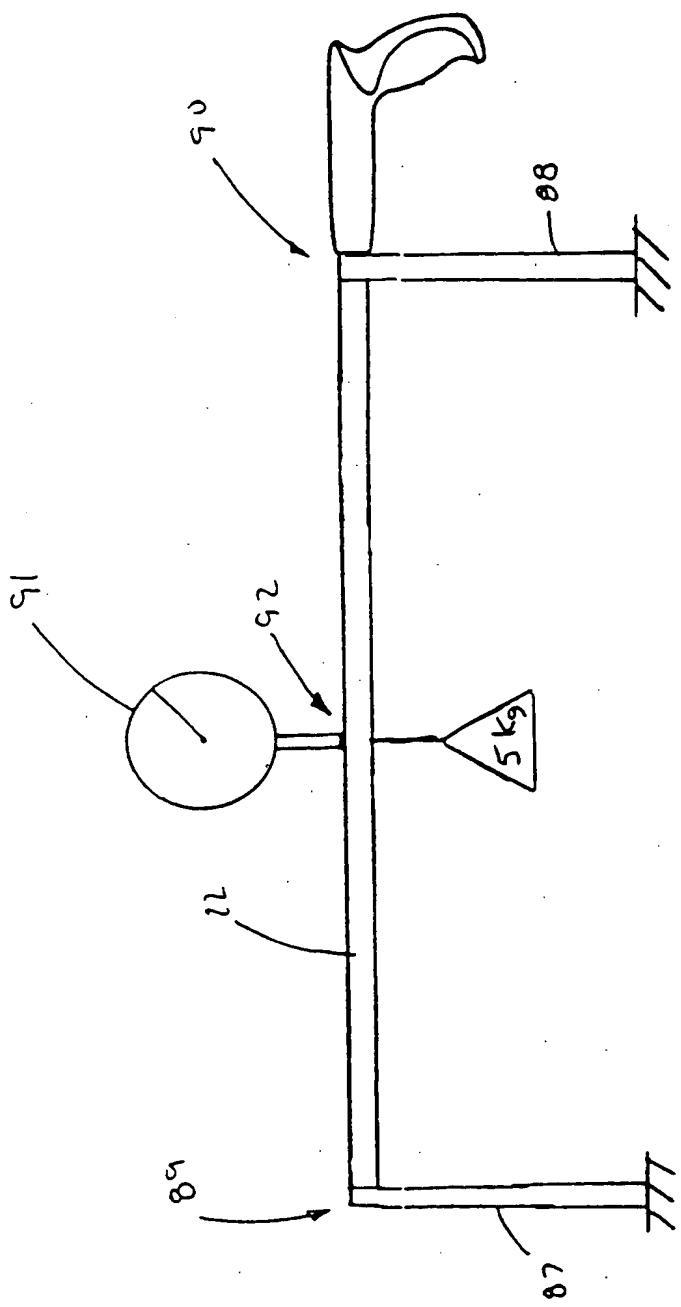


FIG 12

09/831480

WO 00/27271

11 / 13

PCT/US99/26579

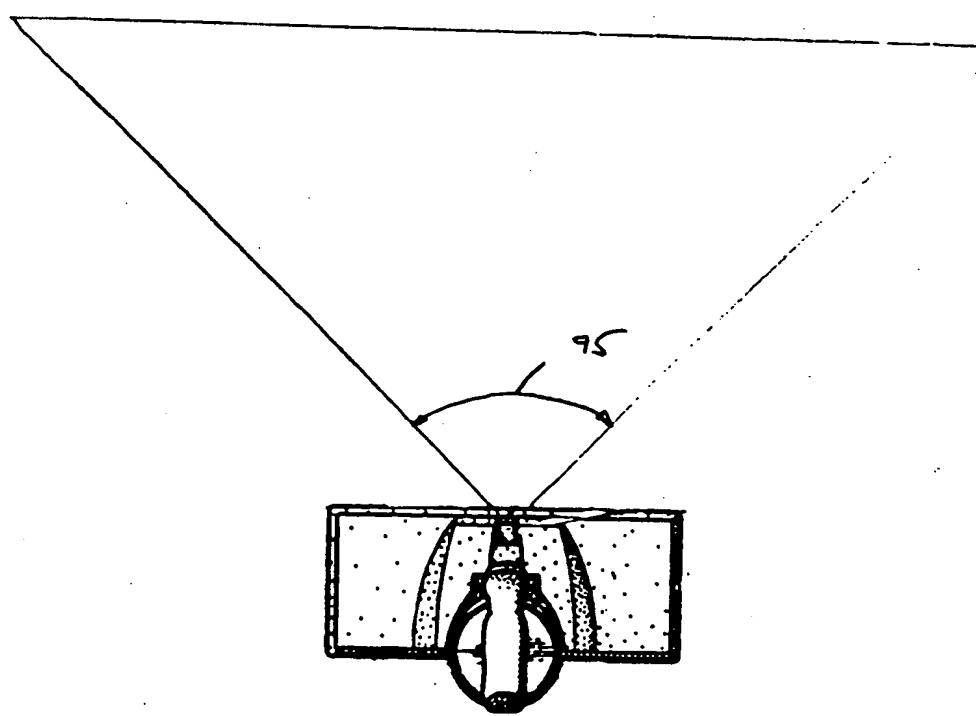
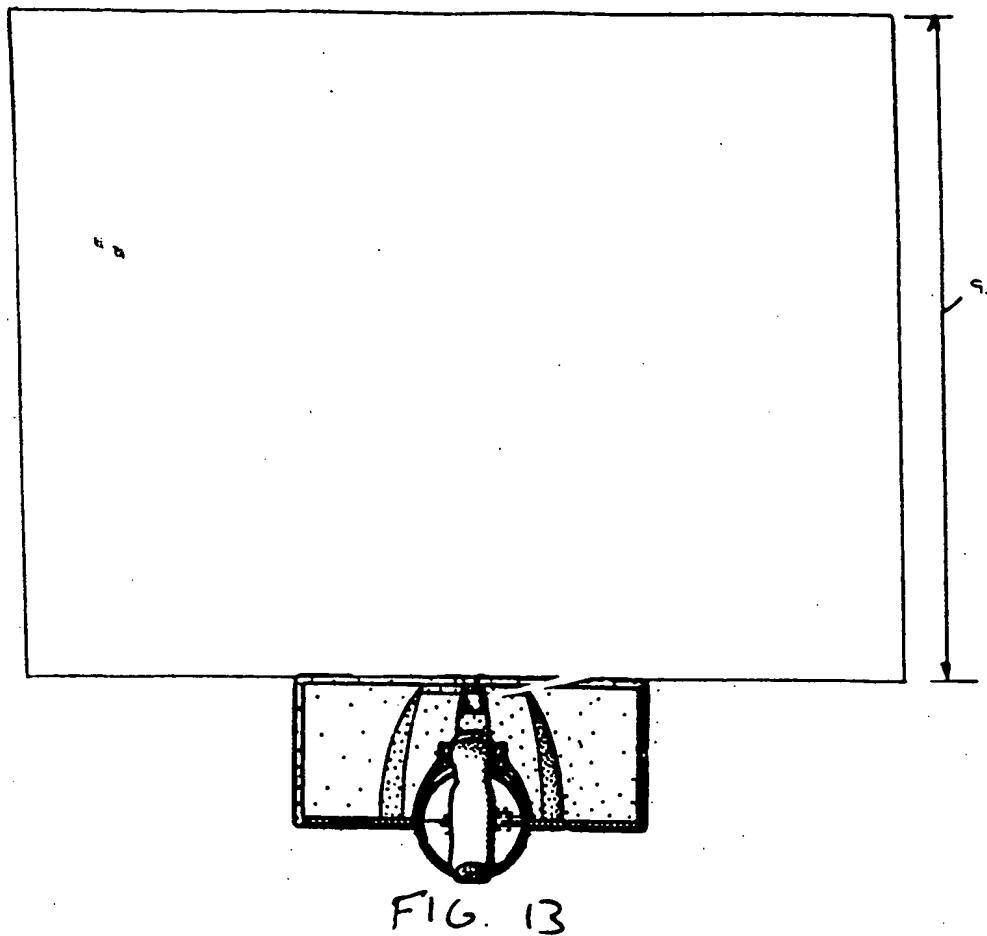


FIG. 13A

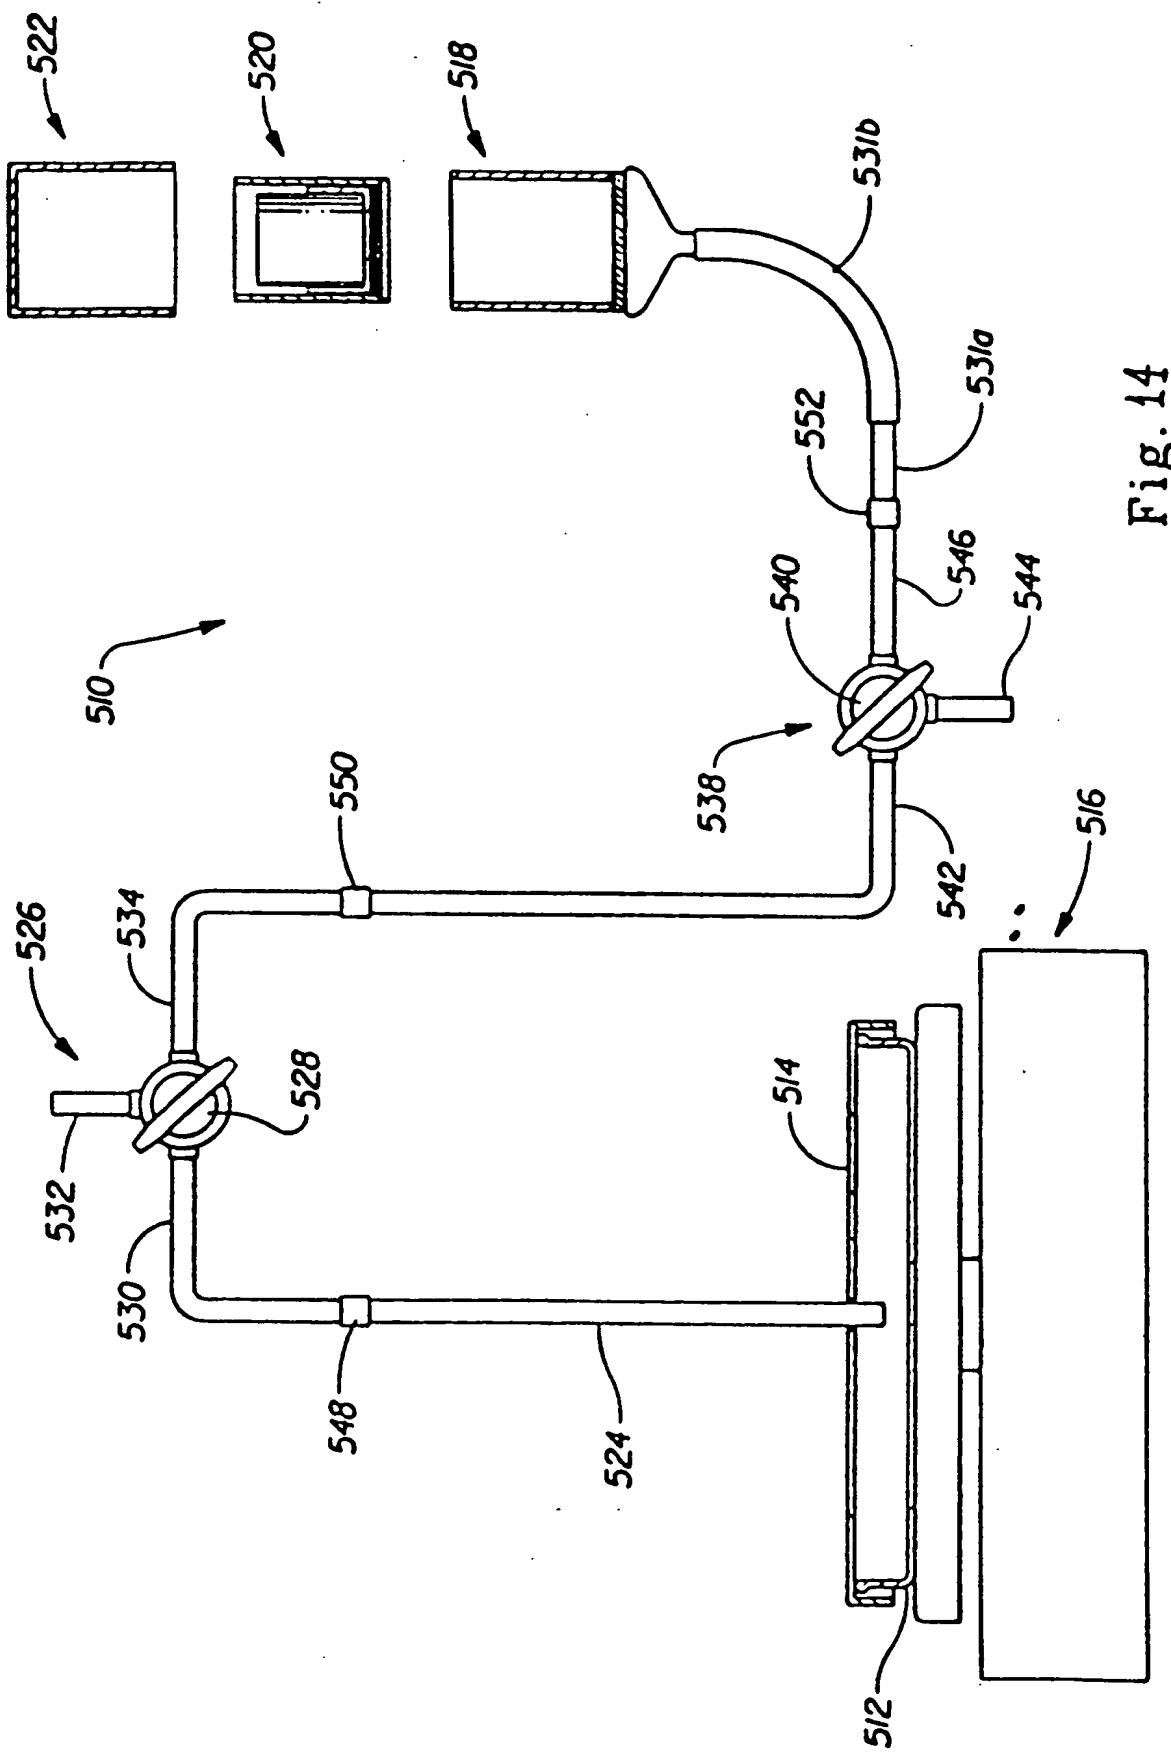


Fig. 14

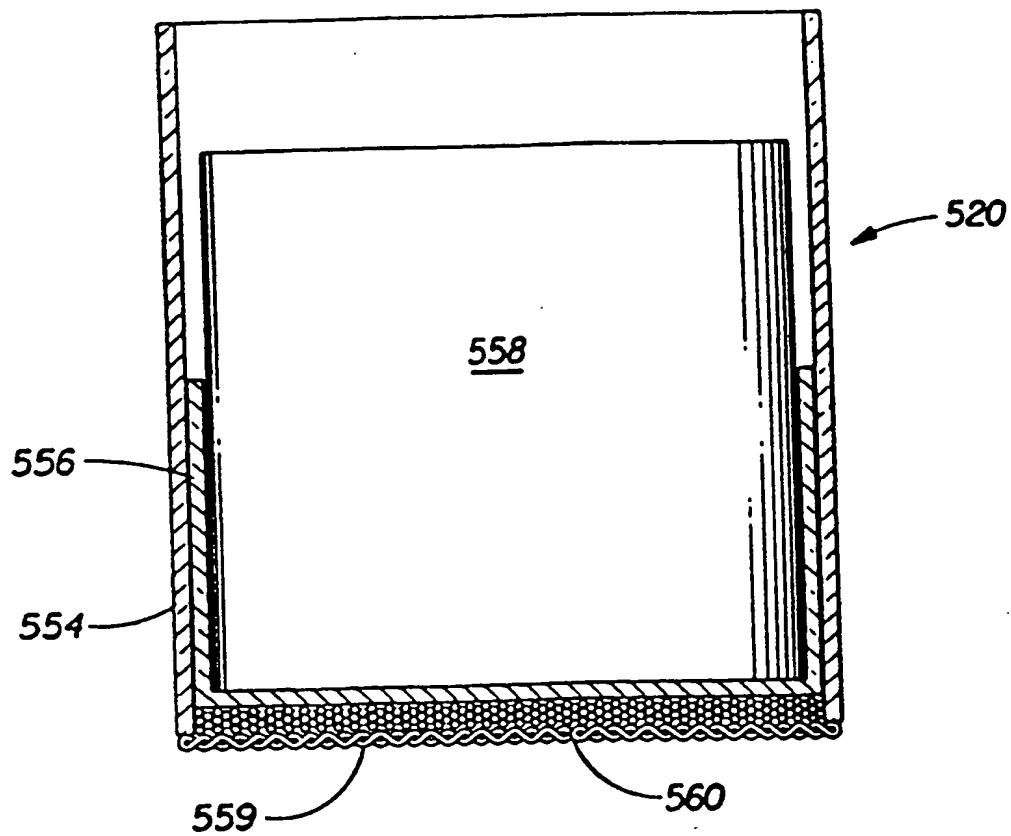


Fig. 15